

# GUARDLIGHT GL600 WIRELESS

Battery Powered Security Light

Product Code: OT01235

## Introduction

The Defender GuardLight GL600 Wireless is a powerful outdoor light with a durable ABS casing. The quadruple LED display generates an impressive 600 lumens (8W) of bright white light, activated by a built-in motion sensor.

This battery powered light requires no wiring, making for a quick and easy installation. The body can also be rotated a full 360° to illuminate at your desired angle. Each activation lasts 30 seconds and a built-in light sensor prevents activation during daylight, conserving your battery power.

## Contents


- 1 x Defender GuardLight GL600 Wireless
- 4 x D cell batteries (already fitted)
- 3 x Screws
- 3 x Wall plugs

## Caution

- Do not install the light close to people or cars. Keep out of reach of children.
- Do not install the unit close to flammable items.
- Do not stare directly into the light.
- When changing batteries, use only new 1.5V D cells.

## Your Light


1. Light and Motion Sensors
2. LED Lights
3. Fixed Base
4. Elevation Control Knob
5. Rotation Control Knob

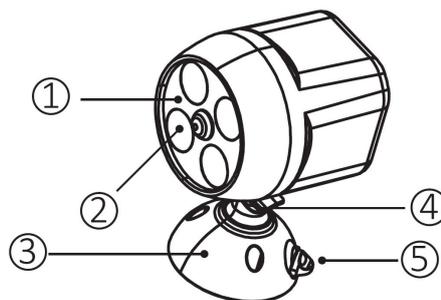

## Installation


1. Your Defender GuardLight GL600 comes with 4 x D cell batteries pre-installed. Before first use, unscrew the front cover of the light in an anti-clockwise direction (Figure 1) and move the switch to 'On'. Your light now has power.

Figure 1

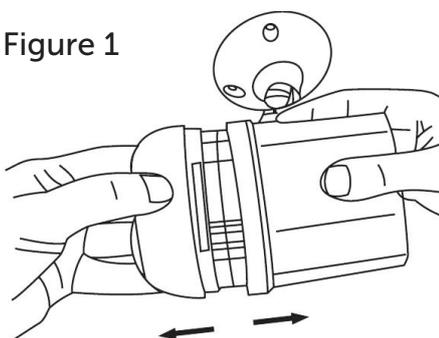

2. Reattach the front cover by aligning the grooves by screwing in a clockwise direction.

Figure 2

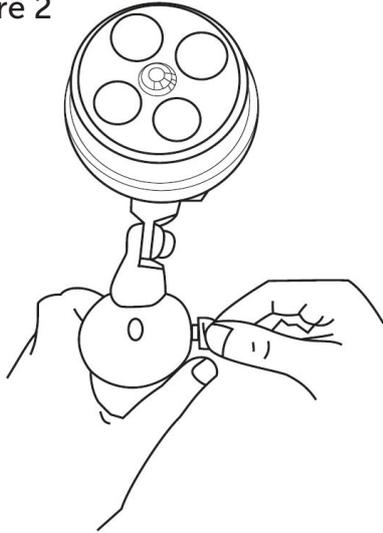

3. To wall mount your light, first remove the mounting base by turning the thumb screw anti-clockwise (**Figure 2**).

4. Utilise the three holes to secure the mounting base to your desired wall, using the screws provided (**Figure 3**). For best results and depending on your installation location, consider drilling three pilot holes and using the wall plugs provided.

5. Insert the light unit back into the mounting base (**Figure 4**). You can now rotate the light around a full 360° to achieve the desired angle, before tightening the thumb screw in a clockwise direction.

6. You can also pivot the light up and down to your desired angle by loosening the upper thumb screw in an anti-clockwise direction (**Figure 5**). Once the angle is set, tighten the thumbscrew in a clockwise direction.

Figure 3

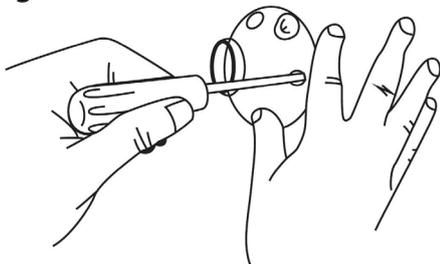


Figure 4


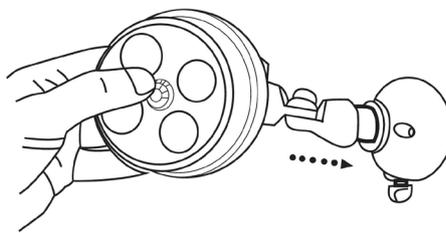


Figure 5

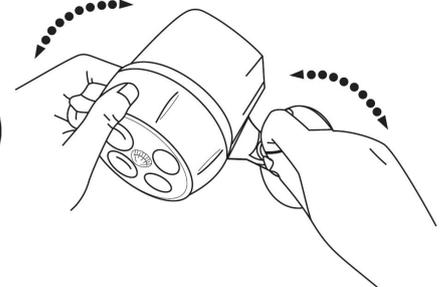

## Changing the Batteries

Note:- You do not have to remove the full fixture from the wall to change the batteries.

1. Remove the front cover of the light by unscrewing in an anti-clockwise direction (**Figure 1**), revealing the battery holder. Separate the battery holder by squeezing the two tabs on the side and pulling (**Figure 6**).

2. Insert 4 x D cell batteries into the holder (**Figure 7**), ensuring the correct polarity.

3. Reattach the battery holder by aligning the grooves on the side and clicking the tabs into the inside of the holder (**Figure 8**). Screw the light back onto the holder (**Figure 1**).

Figure 6

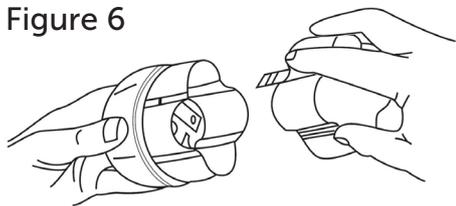


Figure 7


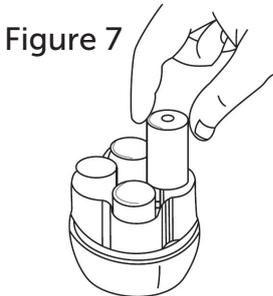


Figure 8

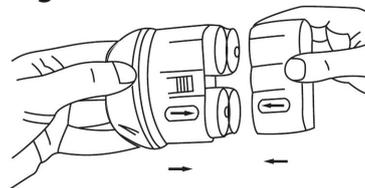

## Important Information

The GuardLight GL600 is IP44 rated, meaning it is fully resistant to water splash from any direction. However, if the light is completely exposed to the elements and poor weather, some penetration may be possible. If using outdoors, it is therefore advised that you install the light in a location with some protection e.g. an overhang of a roof, porch or garage.

### Solon Security

Unit 40, Manor Industrial Estate  
Flint, Flintshire, CH6 5UY

[solonsecurity.co.uk](http://solonsecurity.co.uk)

### Industry leaders in quality

