

105mm × 148mm 70克双胶纸

HYLITE

WARNINGS:

1. Please read this instruction carefully before using the product.
2. Please fully charge the lamp before first usage and recharge it within 3 months.
3. Suitable for Open Fixture only; the product is Not Dimmable, do not use with Dimmers.
4. Before removing the product from fixture, turn off power first, let the lamp cool down to avoid electric shock or burn.
5. Connect 5 emergency lamps maximum in one circuit.


INSTRUCTIONS:

1. This lamp works in two modes:
 - A. AC Mode – When power supply is available, it works like a normal lamp, and its brightness level cannot be adjusted.
 - B. DC Mode – When power supply is cut-off, it automatically switches to DC mode and work as an emergency lamp. Under DC Mode, it still can be turned on or off by the switch. Under DC Mode, the lamp offers three brightness level options controlled by turning on and off the switch.
2. Install the lamp into AC socket, when the lamp operates under AC mode, charging process starts automatically; when the lamp is turned off, charging process will stop.
3. When the lamp is fully charged, under DC mode, the light duration depends on the battery capacity embedded in the lamp; Please refer to below table for details.



| Battery Capacity | Charging Duration | Lighting Duration of Three Brightness Level on DC Mode | | |
|------------------|-------------------|--|----------|----------|
| | | 300LM | 120LM | 50LM |
| 1200 mAh | 10 Hours | 2 Hours | 4 Hours | 7 Hours |
| 2000 mAh | 20 Hours | 3 Hours | 6 Hours | 9 Hours |
| 2200 mAh | 22 Hours | 3.5 Hours | 9 Hours | 12 Hours |
| 2500 mAh | 24 Hours | 4 Hours | 12 Hours | 16 Hours |

APPLICATIONS:

AC Mode:



DC Mode:



INSTALLATION:

1


Smart emergency 3 in 1

- Use as a normal lamp
- Use as an emergency lamp
- Use as a flashlight



2

Electrical wiring diagram

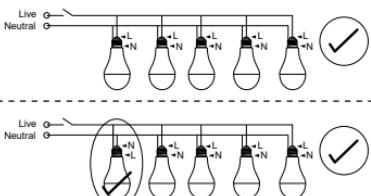


b

Before initial usage, reset the lamp by turning on and off the light quickly once within 1 second with its switch.


3

Do not connect the emergency lamp together with other lamps or electric appliances

Case 1: Other lamp



Case 2: Electric appliance



Please fully charge the lamp before first usage and recharge it within 3 months.